



Features

- Flicker Free
- Easy Installation
- Energy Saving

Benefits

- Light without flicker reduces stress while working/living underneath
- Light housing and driver on board design ensure 1 step plug-and-play
- Up to 60% energy savings from CFL downlight

Application




Specification

Item Code	Item Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Input Current (mA)	Lifetime (L70B50)	MOQ (pcs)
540001033810	LEDDownlightRc-ESVI R72-5W-3000-WH-NV	5	0.5	275	55	38	20000	900
540001033710	LEDDownlightRc-ESVI R72-5W-4000-WH-NV	5	0.5	300	60	38	20000	900
540001033310	LEDDownlightRc-ESVI R72-5W-6500-WH-NV	5	0.5	300	60	38	20000	900
540001033510	LEDDownlightRc-ESVI R72-7W-3000-WH-NV	7	0.5	395	55	50	20000	900
540001033410	LEDDownlightRc-ESVI R72-7W-4000-WH-NV	7	0.5	420	60	50	20000	900
540001033610	LEDDownlightRc-ESVI R72-7W-6500-WH-NV	7	0.5	420	60	50	20000	900

Technical Specifications	
CRI	80
Colour Consistency (SDCM)	≤ 6
Dimmable	No
Housing Colour	White
IP	IP20
IK	IK02
Driver integrated (Yes/No)	Yes
Glow wire test	650°C
Driver failure rate	1% at 5000h
Weight (pc/kg)	0.08/0.09

Electrical Supply	
Frequency (Hz)	50/60Hz
Voltage (V)	220V-240V
AC/DC	AC
Mechanical Properties	
Optical Material	PA+AL
Housing Material	PC
Application Conditions	
Operating Temperature	-10~+45°C
Application Temperature	25°C
Storage Environment	-25°C~+50°C


CE CB




Packaging Information

Item		Single Box(1pc/box)		Outer box		
Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/CTN)
540001033810	LEDDownlightRc-ESVI R72-5W-3000-WH-NV	114*114*61	0.182	590*355*205	8.19	45
540001033710	LEDDownlightRc-ESVI R72-5W-4000-WH-NV	114*114*61	0.182	590*355*205	8.19	45
540001033310	LEDDownlightRc-ESVI R72-5W-6500-WH-NV	114*114*61	0.182	590*355*205	8.19	45
540001033510	LEDDownlightRc-ESVI R72-7W-3000-WH-NV	114*114*61	0.192	590*355*205	8.64	45
540001033410	LEDDownlightRc-ESVI R72-7W-4000-WH-NV	114*114*61	0.192	590*355*205	8.64	45
540001033610	LEDDownlightRc-ESVI R72-7W-6500-WH-NV	114*114*61	0.192	590*355*205	8.64	45


Dimensional Drawing

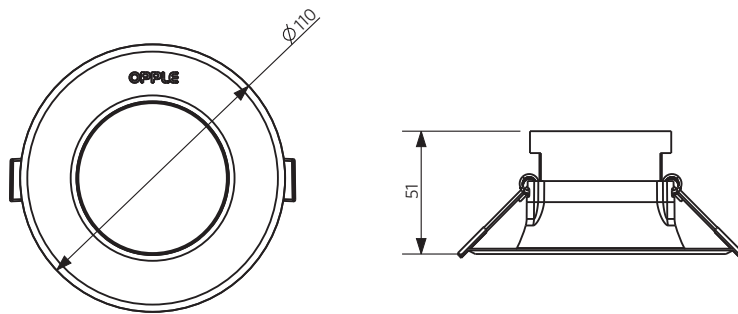

Cut-out Drawing

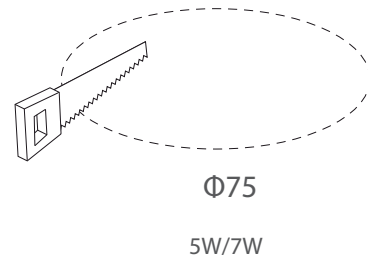

Photometric Data

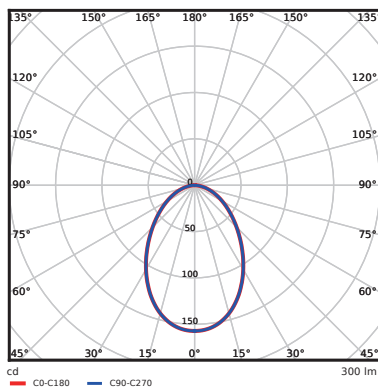

5W/7W

OPPLE SHANGHAI OFFICE

Building V3, The Mixc, 1799 Wuzhong Road,
Minhang District, Shanghai, China

ZIP: 201103

T +86 21 3855 0000

E intersales@opple.com

WWW.OPPLE.COM/EN