

LED RGB Soft Strip HV

Features

- 24 keys RGB remote controller, Six modes with four speeds
- Special design to keep functioning despite individual bad LED chips, lifetime 20000hrs
- High quality and highly transparent PVC

Benefits

- Ideal choice for decoration
- Intelligent control, various light colors
- Pure and uniform light, bring premium lighting experience

Application



Specification

Product Description	Power (W/m)	Power Factor	Beam Angle (°)	Life Time (hrs)L70	Input Current (mA)	Warranty period (month)
LED-HV-Strip-5050-RGB-3.5W-50M	3.5(single color)	0.9	120	20000	23	12+3

Application Conditions

IP	IP20
Operating Temperature	-20~40°C
Application Temperature	25°C
Storage Environment	-25~50°C

Mechanical Properties

Optical Material	High quality PVC
Housing Material	High quality PVC
Finishing Colour	Transparency


Electrical Supply

Frequency (Hz)	50/ 60
Voltage (V)	220~240
AC/DC	AC

Packaging Information


Product Description	Outer Box			Remark
	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/unit)	
LED-HV-Strip-5050-RGB-3.5W-50M	330*330*170	7.72±5%	50M/CNT	50M/roll
LED-HV-Strip-5050-RGB-Accessory Package	448*405*340	14.00	72PCS/CNT	
LED-HV-Strip-5050-RGB-Remote Controller	280*230*265	4.06	72PCS/CNT	

Dimensional Drawing

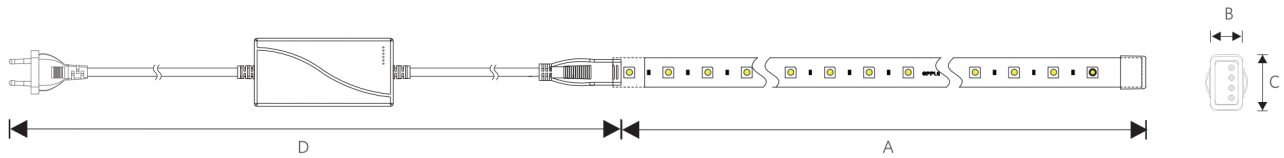

	5050
A (mm)	50000
B (mm)	11
C (mm)	18.5
D (mm)	810

Accessory Information

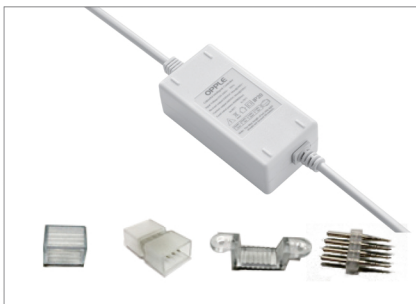

LED RGB Soft Strip HV Accessory package