
PRODUCT FEATURES

ICON	Description
BLE Bluetooth Control	Compatible with "OPPLE Smart Lighting" APP and OPPLE smart platform.
DALI DALI Control	Compatible with OPPLE smart platform and DALI products of other brands.
0-10V 0-10V Control	Compatible with OPPLE smart platform and 0-10V products of other brands.
((o)) Sensor Control	Auto On/Off with built-in microwave sensors.
Remote Control	Equipped with remote control.
3000K 4000K 6500K Tunable	Tunable in three color temperatures using switch.
Orange Blue Pink Tunable	Tunable in three different colors using switch.
Dimmable	Adjusting brightness smoothly.
Alexa	Compatible with Amazon Alexa.
Google Assistant	Compatible with Google Assistant.
16 Million Colors	Creating perfect ambient for any occasion.
Voice Control	Available with Google Assistant and Amazon Alexa.

ICON	Description
l!25% Higher Brightness	Higher brightness, easily save more.
ErP COMILARCE Up to 165 Im/W	Meets European energy efficiency standards, more energy saving.
SDCM-s Uniform Light Colors	Excellent light quality, no difference for each lamp.
RGO No Blue Light	No photobiological hazard, harmless to people's eyes.
Flicker Free	Healthy lighting environment and eye protection.
95% Light Transmittance	High system efficacy with lower power consumption.
CRI>90	Excellent color rendering index,visual space vivid.
Anti-glare	Anti-glare design ensures high visual comfort.
UGR<19	Low glare from the luminaire, comfortable light for eyes.
Precise Light Control	Every beam of light is precisely controlled and useful.
Indirect Light	Up & down light,soft light, relaxed and comfortable.

ICON	Description	ICON	Description
TUV Approved	TUV approved.	100000 hrs+	Long lifespan for 100Khrs(L70B50).
Energy Saving	Solar Energy Only,No Electricity Expense	3yrs Warranty	3 years warranty.
EMC Compliance	No disruption by other lamp and to the grid.	Never Fading	Premium optical PMMA material, never fading during lifetime.
▶ DEKRA Dekra Approved	Dekra approved.	650°C Antiflaming	Antiflaming material with 650°C endurance.
0.9 High PF	High power factor 0.9,reduce grid's load.	20,000 On-Off	Withstand 20,000 times on-off.
Best TCO of Replacement	Low total cost of lamp replacement.	IP67 Dustproof & Waterproof	Dust-tight and protected against the effects of water immersion.
Emergency	Emergency lighting option available.	IK10 Impact Resistant	Resistance to shock of 20J.
Lighting Source Replaceable	Easy replacement of light source.	Rustproof	Against rust or corrosion by rustproof material & special surface finishing.
Stream Line Housing	Streamline housing, reduce air resistance.	Anti-shock	Shockproof.
Robust Housing	Robust housing.	Wind-Resistance	Against super typhoon class 16.
Wide Withstand Voltage	Wide withstand voltage range of 100-300V.	Up to 10KV Surge Protection	Protect electrical devices from voltage spikes up to 10kV.
100 240v Wide Rated Voltage	Wide rated voltage of 100-240V.	-40+50°C Ambient Tempeature	Operating temperature between -40 $^{\circ}$ C and 50 $^{\circ}$ C.

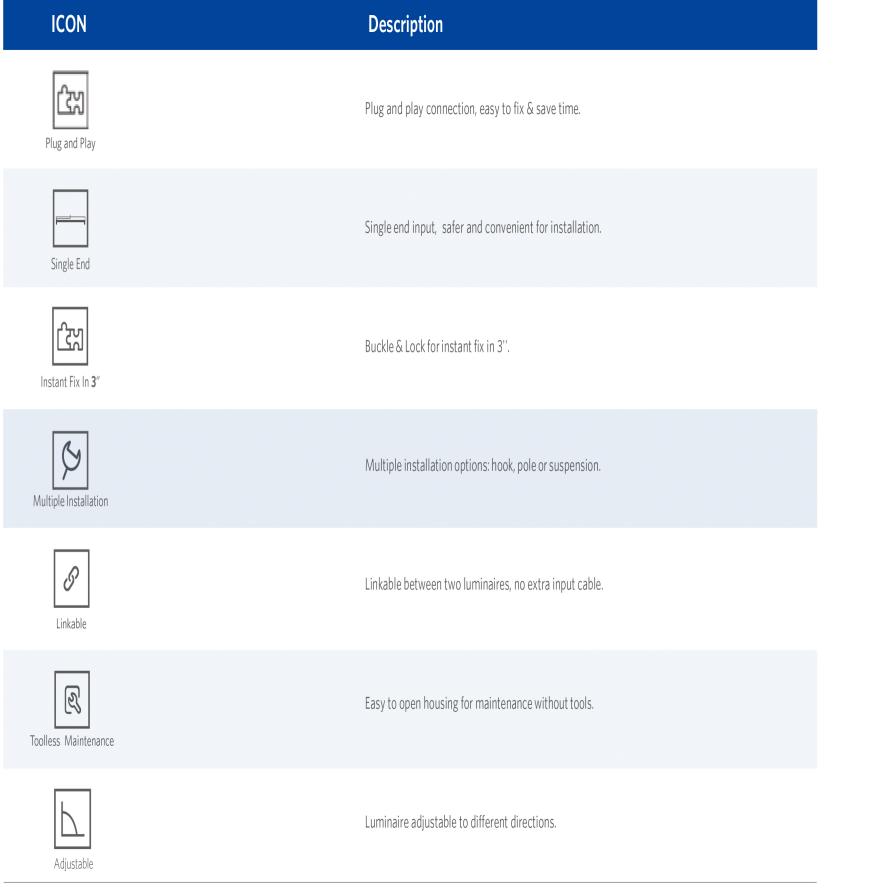

PRODUCT - EATIBEC